


# Gravel-Lok™ Overlay on Existing Gravel Base


**Note:** See Edging option CAD

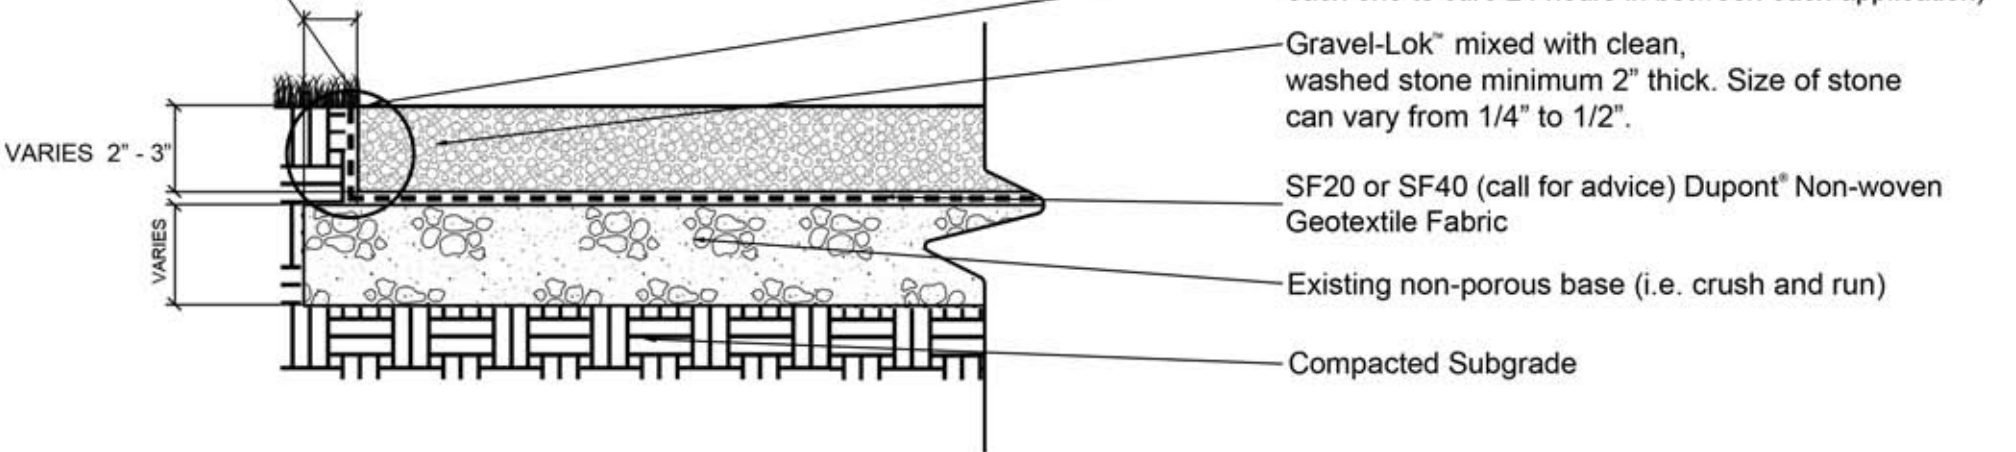

## NOTES:

- \* If you are using our product for the first time, please call for installation advice.
- \* Within 4 - 6 weeks, inspect surface for loose stones. Repair promptly. Repeat inspection and repair annually. For repair methods, contact Contact Cell-Tek Geosynthetics LLC.
- \* Mix liquid with stones and trowel them out (Bound Method). For a smooth surface using the Bound Method, the bounded surface must be a minimum of 3 times the thickness of the stone you are using.
- \* Stones must be completely clean, dry and free from any fines.
- \* Angular stones will create a stronger pavement than rounded stones.
- \* For ADA compliance use stones which are 1/8" - 1/2" in size.

## LEGEND

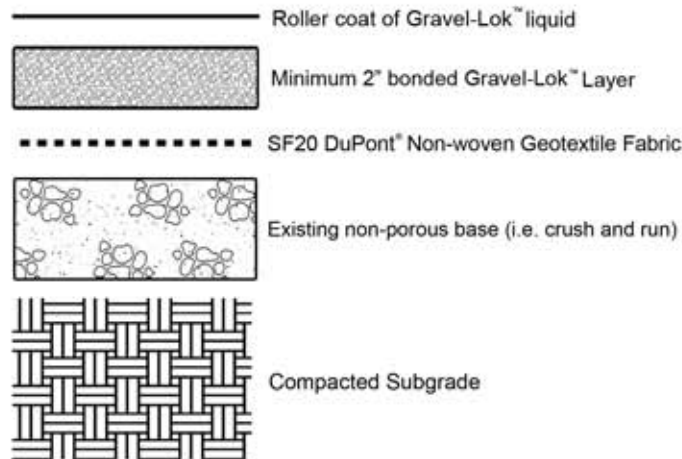

**CELL-TEK**  
Geosynthetics

809 Barkwood Ct., Suite M  
Linthicum Heights, MD 21090

Phone: 410.721.4844

Fax: 410.721.3844

Email: [info@celltekdirect.com](mailto:info@celltekdirect.com)

[www.celltekdirect.com](http://www.celltekdirect.com)