


## REBAR J HOOKS



Rebar J Hooks are used to keep the Load Support Grid (LSG series) pinned down in the following applications:

- Grassy paving
- Loose gravel paving
- Beach access (sand paving)

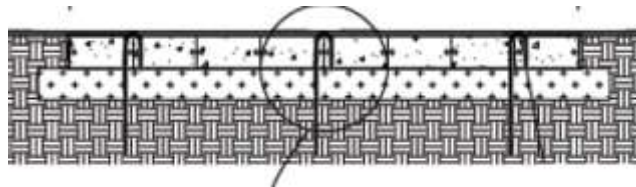

Rebar J Hook

\*Rebar J hooks should not be used if you are installing Gravel-Lok, brick pavers, concrete or asphalt over the Load Support Grid.


Choosing the right Rebar J Hook – Use a Rebar J Hook which is at least 4 times the cell depth of the Load Support Grid

Cell Depth of LSG	Correct Size Rebar J Hook	Product Code Number
3"	18"	JHR18
4"	18"	JHR18
6"	18" (relatively flat areas) or 24" (sloped areas)	JHR18 or JHR24

## Placement of Rebar J Hooks

The goal is to place Rebar J Hooks every 3' – 4' in all directions. And, be sure to place one every 3' around the perimeter. Suggested placement is shown below.

LSG-3, LSG-4 and LSG-6 (9' x 24')

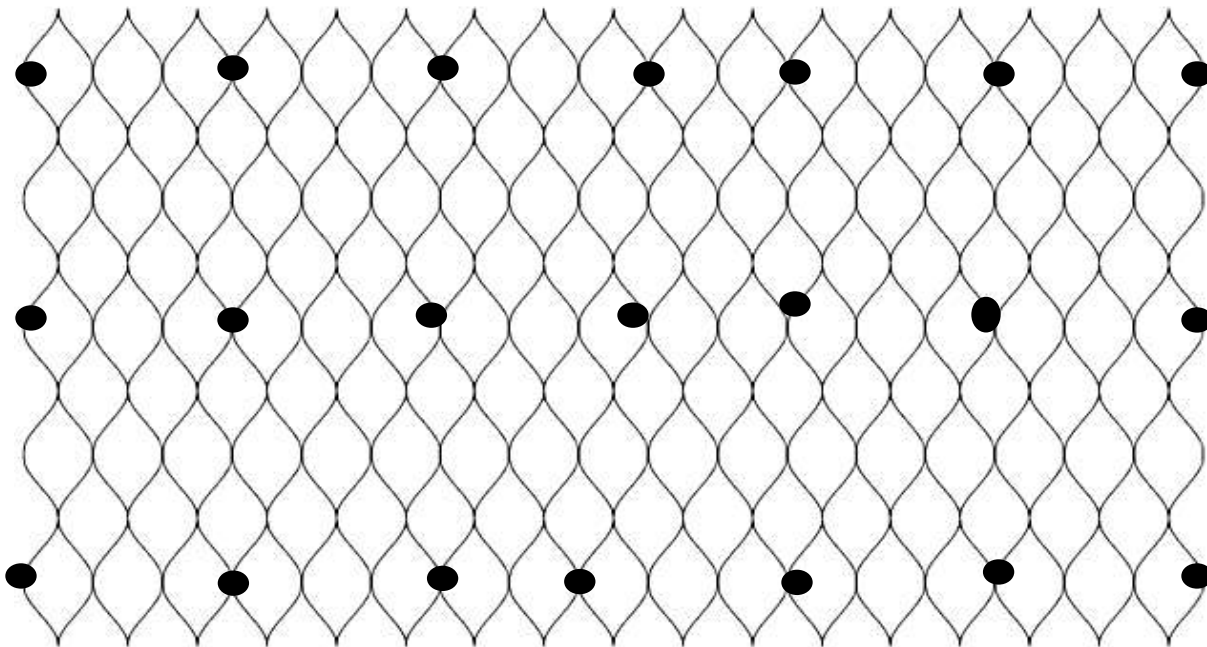

(3) (3) (3) (3) (3) (3) (3) = total 21